

FORM PTO-1390 (Modified)  
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

## TRANSMITTAL LETTER TO THE UNITED STATES

DESIGNATED/ELECTED OFFICE (DO/EO/US)

CONCERNING A FILING UNDER 35 U.S.C. 371

9319S-000059

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

N/A 09/051450

INTERNATIONAL APPLICATION NO.

PCT/JP97/02543

INTERNATIONAL FILING DATE

July 23, 1997

PRIORITY DATE CLAIMED

August 6, 1996

## TITLE OF INVENTION

Liquid Crystal Display Device and Electronic Device Using the Same

APPLICANT(S) FOR DO/EO/US

Eiji MURAMATSU

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 18 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.  
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Translation of International Search Report; Form PTO-1449 with copies of references cited therein (5 Japan); 8 sheets of drawings showing FIGS. 1-8; and Request for Approval of Drawing Changes with copy of amended FIG. 8.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) <b>N/A</b>		INTERNATIONAL APPLICATION NO. <b>PCT/JP97/02543</b>		ATTORNEY'S DOCKET NUMBER <b>9319S-000059</b>	
---	--	--	--	---	--

20. The following fees are submitted:

BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :			CALCULATIONS    PTO USE ONLY	
<input checked="" type="checkbox"/> Search Report has been prepared by the EPO or JPO . . . . .	\$930.00			
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) . . . . .	\$720.00			
<input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) . . . . .	\$790.00			
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . .	\$1,070.00			
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) . . . . .	\$98.00			
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				
		<b>\$930.00</b>		
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30			<b>\$0.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	24    - 20 =	4	x    \$22.00	<b>\$88.00</b>
Independent claims	3    - 3 =	0	x    \$82.00	<b>\$0.00</b>
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,018.00</b>
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>
<b>SUBTOTAL =</b>				<b>\$1,018.00</b>
Processing fee of <b>\$130.00</b> for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30			+	<b>\$0.00</b>
<b>TOTAL NATIONAL FEE =</b>				<b>\$1,018.00</b>
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input checked="" type="checkbox"/>				<b>\$40.00</b>
<b>TOTAL FEES ENCLOSED =</b>				<b>\$1,058.00</b>
			Amount to be:	\$
			refunded	\$
			charged	\$

☒ A check in the amount of **\$1,058.00** to cover the above fees is enclosed.

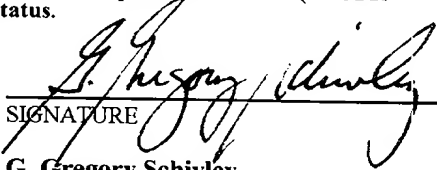
☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **08-0750** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

G. Gregory Schivley, Esq.  
 Harness, Dickey & Pierce, P.L.C.  
 P.O. Box 828  
 Bloomfield Hills, MI 48303

  
 SIGNATURE  
 G. Gregory Schivley  
 NAME  
 27,382  
 REGISTRATION NUMBER  
 April 6, 1998  
 DATE

## IN THE CLAIMS

Please amend the Claims as follows:

4. (AMENDED) A liquid-crystal display device according to [any one of claims 1 to 3] Claim 1,

characterized in that said semiconductor element is joined to one of said substrates such that an active surface of said semiconductor element faces said substrate.

5. (AMENDED) A liquid-crystal display device according [any one of claims 1 to 4] to Claim 1,

characterized in that a polarizing plate is arranged on a surface of the other of said substrates, and said light-shielding member [is constituted by] comprises a portion located outside an effective display region of said polarizing plate.

6. (AMENDED) A liquid-crystal display device according to [any one of claims 1 to 4] Claim 1,

characterized in that said light-shielding member is a molding resin which covers the surface of said semiconductor element joined to said substrate.

7. (AMENDED) A liquid-crystal display device according to [any one of claims 2 to 4] Claim 2,

characterized in that said light-shielding member and said second light-shielding member [are constituted such that] further comprise a light-shielding tape having light-shielding properties and flexibility [is] adhered to one of said substrates to be bent around said substrate.

8. (AMENDED) A liquid-crystal display device according to [any one of claims 2 to 4] Claim 2,

characterized in that a polarizing plate is arranged on a surface of one of said substrates, and said second light-shielding member [is constituted by] comprises a portion located outside an effective display region of said polarizing plate.

9. (AMENDED) A liquid-crystal display device according to [one of claims 2 to 6] Claim 2,

characterized in that said second light-shielding member [is constituted such that] comprises a planar sheet member having light-shielding properties [is] adhered to a surface of one of said substrates.

Please add the following new Claims:

12. (NEW) A liquid crystal display device comprising:

a first substrate having inner and outer surfaces;

a second substrate having inner and outer surfaces;

a liquid crystal disposed between said inner surfaces of said first and second substrates;

a semiconductor element having a first surface fixed to a portion of said inner surface of said first substrate; and

a light shielding member secured to one of said first and second substrates at a location spaced apart from said portion of said inner surface where said semiconductor element is fixed so as to shield at least part of said semiconductor element from non-desired light.

13. (NEW) The liquid crystal display device of Claim 12 wherein said light shielding member is secured to said outer surface of said first substrate opposite said portion of said inner surface where said semiconductor element is fixed so as to shield at least said first surface of said semiconductor element from non-desired light.

14. (NEW) The liquid crystal display device of Claim 13 wherein said light shielding member further comprises a polarizing plate secured to said outer surface of said first substrate.

15. (NEW) The liquid crystal display device of Claim 13 wherein said light shielding member further comprises an adhesive sheet secured to said outer surface of said first substrate.

16. (NEW) The liquid crystal display device of Claim 15 wherein said adhesive sheet wraps around said first substrate so as to overlay said semiconductor element.

17. (NEW) The liquid crystal display device of Claim 12 wherein said light shielding member is secured to said outer surface of said second substrate and overlays said semiconductor element so as to shield at least one surface of said semiconductor element other than said first surface fixed to said inner surface of said first substrate from non-desired light.

18. (NEW) The liquid crystal display device of Claim 17 wherein said light shielding member further comprises a polarizing plate secured to said outer surface of said second substrate.

19. (NEW) The liquid crystal display device of Claim 12 wherein said light shielding member is secured to said inner surface of said first substrate and overlays said semiconductor element so as to shield at least one surface of said semiconductor element other than said first surface fixed to said inner surface of said first substrate from non-desired light.

20. (NEW) The liquid crystal display device of Claim 19 wherein said light shielding member further comprises a resin mold.

21. (NEW) The liquid crystal display device of Claim 19 wherein said light shielding member further comprises an adhesive sheet.

22. (NEW) The liquid crystal display device of Claim 21 wherein said adhesive sheet wraps around said first substrate so as to shield at least said first surface of said semiconductor element fixed to said inner surface of said first substrate.

23. (NEW) The liquid crystal display device of Claim 12 wherein said light shielding member is secured to said outer surface of said first substrate and to a connection circuit substrate so as to shield at least said first surface of said semiconductor element from non-desired light.

24. (NEW) The liquid crystal display device of Claim 23 wherein said light shielding member further comprises an adhesive sheet.

### REMARKS

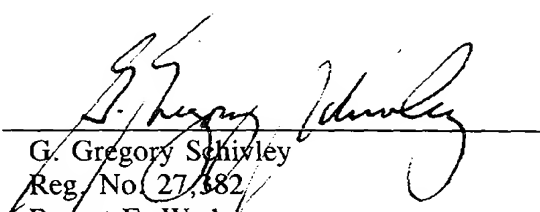
The purpose of this preliminary amendment is to clarify the application as originally filed, eliminate multiple-dependent claims, and add additional claims to provide applicant with a scope of protection commensurate with its contribution to the art.

Favorable consideration of this application is respectfully requested.

Respectfully submitted,

Date: April 6, 1998

By:

  
G. Gregory Schivley  
Reg. No. 27,382  
Bryant E. Wade  
Reg. No. 40,344  
Attorneys for Applicant

Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, MI 48303  
(248) 641-1600

GGs/BEW/cmb

- 1 -

## SPECIFICATION

LIQUID-CRYSTAL DISPLAY DEVICE AND  
ELECTRONIC DEVICE USING THE SAME

## [TECHNICAL FIELD]

The present invention relates to a liquid-crystal display device which controls the orientation of a liquid crystal to display visible information. More specifically, the present invention relates to a liquid-crystal display device in which a semiconductor element is directly packaged on a substrate constituting a liquid-crystal panel. The present invention also relates to an electronic device on which the liquid-crystal display device is mounted.

## [BACKGROUND ART]

In recent years, liquid-crystal display devices are popularly used in various devices such as a navigation system, a television set, a palm-top computer, an electronic organizer, and a portable telephone to display visible information. As a packaging method of packaging a semiconductor element, e.g., a driver IC, on a liquid-crystal panel in manufacturing a liquid-crystal display device, a packaging method of directly joining a semiconductor element to one of a pair of substrates which are opposite to each other through a liquid crystal, i.e., a COG (Chip On Glass) method, is known. When the COG method is used, reductions in thickness and weight of a liquid-crystal



display device, micropatterning of connection pitch, and the like are expected. However, when the COG method is used, a semiconductor element is directly joined to a transparent substrate by a joining agent such as an ACF (Anisotropic Conductive Film). For this reason, light from a back light or sunlight may be directly irradiated on the semiconductor element through the substrate. The irradiated light may cause the semiconductor element to erroneously operate. The following problem is also posed. That is, light irradiated from a portion other than the active surface of a semiconductor element passes through the semiconductor element to adversely affect the active surface. As a result, the semiconductor element is erroneously operated. In order to prevent light from being irradiated on a semiconductor element packaged on a substrate by the COG method, the following conventional liquid-crystal display device is disclosed in Japanese Unexamined Patent Publication No. 1-128534. FIG. 8 is a view showing a typical example of a liquid-crystal display device of this type. In a metal film forming process step for forming an active element on a substrate, a metal film 51 is also formed in a region corresponding to an IC chip, i.e., a semiconductor element, and the metal film 51 is used as a light-shielding layer for the IC chip 12.

However, in the conventional liquid-crystal display device, light irradiated from the upper or side surface of the IC chip, i.e., a surface other than the active surface of the

semiconductor element, and passing through the upper surface of the semiconductor element to adversely affect the active surface of the semiconductor element, and light being incident from the connection surface between a substrate on which the semiconductor element is packaged and the semiconductor element to adversely affect the active surface of the semiconductor element are not considered. The light-shielding effect is not perfect.

In addition, in the conventional liquid-crystal display device, a light-shielding layer is consequently formed between the IC chip and the substrate. For this reason, a process for reducing a capacitance formed between the IC chip and the light-shielding layer, e.g., a process of forming the light-shielding layer as a special pattern must be performed.

However, this process may be complex, and light-shielding performance may be degraded because the light-shielding layer is formed as the special pattern.

#### [DISCLOSURE OF INVENTION]

The present invention has been made in consideration of the above problems in a conventional liquid-crystal display device, and has as its object to provide a liquid-crystal display device, using the COG method, in which light can be prevented from being irradiated on a semiconductor element by only performing an extremely simple process without performing any complex process.

In order to achieve the above object, according to the present invention, a liquid-crystal display device having a pair of substrates which are opposite to each other through a liquid crystal, and a semiconductor element which is directly joined to at least one of the substrates, is characterized in that a portion of the semiconductor element other than the surface joined to one of the substrates is covered with a light-shielding member.

In this liquid-crystal display device, a light-shielding member is not formed between a semiconductor element and a substrate, and a portion, other than the surface joined to the substrate, of the surfaces of the semiconductor element joined to the substrate is covered with the second light-shielding member. More specifically, the semiconductor element itself is shielded from light by the light-shielding member. With this arrangement, the light-shielding member arranged to cover the semiconductor element completely shields light irradiated from the upper and side surfaces of the semiconductor element and the joint surface between the semiconductor element and the substrate, so that the semiconductor element can be completely prevented from being erroneously operated.

One pair of substrates which sandwich the liquid crystal consist of transparent glass therebetween. However, if there is no inconvenience on manufacture, the substrates may consist of another material such as a transparent synthetic resin. As the semiconductor element, for example, a driver IC for

controlling a scanning electrode for a simple matrix, a data electrode or a driver IC for controlling a scanning line for an active matrix and a data line, and the like can be considered.

Although a method of joining the semiconductor element to the substrate is not limited to a specific method, for example, the semiconductor element can be joined to the substrate by using an ACF.

The second light-shielding member for shielding light being toward the semiconductor element may be arranged on a surface opposite to the surface, to which the semiconductor element is joined, of the surfaces of one of the substrates.

Although the second light-shielding member shields light irradiated from the active surface of the semiconductor element like a conventional light-shielding layer, after the semiconductor element is joined to the substrate, a light-shielding member is fixed to the opposite surface of the substrate. For this reason, the light-shielding member can be arranged by only performing an extremely simple process without performing any complex process. In addition, since the problem of a change in capacitance obtained by arranging the light-shielding member need not be considered, the light-shielding member can be formed as an arbitrary pattern.

Therefore, light can be reliably prevented from being irradiated on the semiconductor element with sufficient light-shielding performance.

The present invention can be also be applied to a

liquid-crystal display device using an active matrix method, or to a liquid-crystal display device using a simple matrix method. The active matrix method is a liquid-crystal display device using a format in which respective pixels arranged in the form of a matrix have active elements as in a TFT (Thin Film Transistor) method, a TFD (Thin Film Diode) method, or the like.

On the other hand, the simple matrix method is a liquid-crystal display device using a formation in which a plurality of pixels having no active elements are arranged in the form of a matrix between a pair of substrates which sandwich a liquid crystal material therebetween, and includes a liquid-crystal display device which has a sign pattern in response to a function request.

The prior art disclosed in Japanese Unexamined Patent Publication No. 1-128534 is on the assumption that the active matrix method is used, and a liquid-crystal display device using the simple matrix method is not considered. If the prior art is to be applied to the liquid-crystal display device using the simple matrix method, a cumbersome thin-film forming process step is assigned to form a metal light-shielding film in a region corresponding to an IC chip, cost uneconomical increases.

Therefore, when the present invention is applied to a liquid-crystal display device using the simple matrix method, a remarkable effect can be obtained. In the liquid-crystal display device using a so-called active matrix method, a light-shielding layer, i.e., a light-shielding member, for shielding the semiconductor element from light in the processing

step of forming an active element on a glass substrate can be incidentally formed. However, since the step of forming an active element is not performed in the simple matrix method, a light-shielding layer cannot be incidentally formed.

As a method of joining a semiconductor element to a substrate, a so-called face-down method which joins the semiconductor element to the substrate such that the active surface of the semiconductor element to the substrate, and a so-called face-up method which joins the semiconductor element to the substrate such that the surface opposite to the active surface of the semiconductor element is in contact with the substrate are considered. The present invention can be applied to the face-down method of the above two methods. When the face-up method is employed, a light-shielding member is not arranged to cover the semiconductor element from the upper surface, but the semiconductor element is joined to the substrate, and a light-shielding member is fixed to a position corresponding to the semiconductor element on the opposite surface of the substrate. In this case, as in the present invention, light irradiated from a surface other than the active surface side of the semiconductor element can be shielded.

According to the present invention, various concrete examples of a light-shielding member can be considered. For example, since a polarizing plate is fixed to the surface of a substrate in a general liquid-crystal display device, the size of the polarizing plate is made large to extend the polarizing

plate to the outside of the effective display region of a liquid-crystal panel, i.e., a portion where the semiconductor element is packaged, and the extended portion can be used as the light-shielding member. Also, a sheet member having light-shielding properties is arranged to cover the semiconductor element, so that the light-shielding member can be constituted. The light-shielding member can also be formed such that the surface of a semiconductor element joined to a substrate is covered with a molding resin. When the semiconductor element is covered with a molding resin, the semiconductor element can be shielded from light. In addition, the semiconductor element is mechanically protected by the molding resin, or the semiconductor element can also be prevented from being exposed to humidity.

As a concrete example of the second light-shielding member, the following can be used. That is, like the above light-shielding member, the size of the polarizing plate is made large to extend the polarizing plate to the outside of the effective display region of a liquid-crystal panel, i.e., a portion where the semiconductor element is packaged, and the extended portion can be used as the light-shielding member. In addition, a sheet member having light-shielding properties may be stuck on the surface, which is opposite to the semiconductor element, of the substrate.

In addition, when one light-shielding tape having light-shielding properties and flexibility is adhered to the

substrate such that the tape is bent around the substrate, the two functions of the light-shielding member and the second light-shielding member can be achieved by one light-shielding tape. In this case, when a tape material having flexibility and elasticity is used as a light-shielding tape, the light-shielding tape can be attached to be in tight contact with the semiconductor element or the substrate. For this reason, the outside size of the liquid-crystal display device is not vainly increased, and operability can be improved.

According to the present invention, an electronic device in which a liquid-crystal display device having a pair of substrates which are opposite to each other through a liquid crystal and a semiconductor element which is directly joined to at least one of the substrates and a main body having a main substrate for sending an external input signal to the semiconductor element are connected to each other by a connection circuit substrate is characterized in that a portion other than a surface, which is joined to one of the substrates, of the surfaces of the semiconductor element is covered with a light-shielding member.

The electronic device is characterized in that a second light-shielding member for shielding light being toward the semiconductor element is arranged on a surface, opposite to the surface, to which the semiconductor element is joined, of the surfaces of one of the substrates to extend to an outside position of one of the substrates, and the extended portion of the second



light-shielding member is arranged to overlap the connection circuit.

In an electronic device such as a portable telephone, it is required to assure the connection reliability of a connection circuit substrate for connecting a main body to a liquid-crystal display device. In the electronic device according to the present invention, the second light-shielding member is formed to extend to the outside portion of the substrate, and the extended portion is arranged to overlap the connection circuit substrate. For this reason, the strength of the connection substrate, especially, the strength of the connection portion, is improved. As a result, higher connection reliability can be obtained. In addition, since the second light-shielding member is used as a reinforcing member for the connection substrate, the number of new parts for reinforcing the connection substrate does not increase, and manufacturing steps for the new parts are not required. For this reason, production cost is not adversely affected.

As a concrete example of the second light-shielding member, the light-shielding member used in the above liquid-crystal display device, i.e., a sheet member comprising a polarizing plate and light-shielding properties can be directly used.

When a flexible substrate such as an FPC is used as the connection circuit substrate, the reinforcing effect becomes more remarkable.

As an example of the electronic device according to the present invention, in addition to a portable telephone, a PDA (Personal Digital Assistant), a personal computer, a car navigation system, and the like are known.

[BRIEF DESCRIPTION OF THE DRAWINGS]

FIG. 1 is a sectional view showing a main part of the first embodiment of a liquid-crystal display device according to the present invention.

Fig. 2 is a sectional view showing a main part of the second embodiment of a liquid-crystal display device according to the present invention.

FIG. 3 is a sectional view showing a main part of the third embodiment of a liquid-crystal display device according to the present invention.

Fig. 4 is a sectional view showing a main part of the fourth embodiment of a liquid-crystal display device according to the present invention.

Fig. 5 is a perspective view showing an example of the liquid-crystal panel portion of the liquid-crystal display device according to the present invention.

FIG. 6 is an enlarged view of a main part of the fifth embodiment of an electronic device according to the present invention.

FIG. 7 is a view showing the fifth embodiment of the electronic device according to the present invention.

FIG. 8 is a view showing a conventional liquid-crystal display device.

[BEST MODE FOR CARRYING OUT THE INVENTION]

(First Embodiment)

FIG. 1 shows the first embodiment of a liquid-crystal display device according to the present invention. This liquid-crystal display device has a pair of substrates 1 and 2 which are opposite to each other. Both the substrates consist of, e.g., transparent glass. A stripe-shaped ITO (Indium Tin Oxide) electrode 3 is formed on the inside surface (lower surface in FIG. 1) of the first substrate 1, and a stripe-like ITO electrode 4 is formed on the inside surface (upper surface in FIG. 1) of the second substrate 2. In this embodiment, the present invention is to be applied to a liquid-crystal display device using a simple matrix method. Therefore, the first substrate 1 and the second substrate 2 are joined to each other by a sealing agent 5 such that the ITO electrodes 3 and 4 are perpendicular to each other as shown in FIG. 5. As well known, pixels for displaying a visible image are formed at the crossing point between the electrodes 3 and 4 in the form of a matrix. Referring to FIG. 1, a liquid crystal is filled in a space R surrounded by the first substrate 1, the second substrate 2, and the sealing agent 5.

As the material of the electrode, any transparent electrode consisting of, e.g., not only an ITO but also a tin

oxide ( $\text{SnO}_2$ ), may be used. As the shape of the electrode on a display surface, not only a stripe shape, but also a special symbol (i.e., a symbol representing a function) as indicated by 10 in FIG. 5 may be used.

Polarizing plates 6 and 7 are fixed to the outside surface (upper surface in FIG. 1) of the first substrate 1 and the outside surface (lower surface in FIG. 1) of the second substrate 2, respectively. The light-transmission axes of the polarizing plates 6 and 7 are offset from each other by, e.g., 90°. A back light unit 15 is arranged on the outside (the lower side in FIG. 1) of the second substrate 2. The back light unit 15 comprises a light-guide plate 8 having an area corresponding to an effective display region D and an LED (Light Emitting Diode) 9 serving as a light source arranged on the left-end portion of the light-guide plate 8.

An end portion 1a of the first substrate 1 projects outside the second substrate 2, an IC output terminal 3a extending from the ITO electrode 3 and an IC input terminal 11 electrically connected to the output terminal of an outer circuit substrate (not shown) are formed on the inside surface of the projection portion 1a. A driver IC 12 serving as a semiconductor element is electrically and mechanically directly fixed to a surface on which bump electrodes 13a and 13b and a circuit pattern are formed, i.e., on the first substrate 1 by an ACF 14 in such a manner that the so-called active surface 12a faces the first substrate 1. Of the surfaces of the driver

IC 12 joined to the first substrate 1, surfaces other than the surface joined to the first substrate 1 are covered with the light-shielding member 7a. In this embodiment, the polarizing plate 7 on the second substrate 2 side is extended to the outside region of the effective display region D, and the light-shielding member 16 is constituted by the extended portion 7a. The polarizing plate 6 arranged on the first substrate 1 fixed to the driver IC 12 extends to the projection portion 1a of the first substrate 1 over the effective display region D, and the polarizing plate extended portion 7a operates as a light-shielding member on the active surface side of the driver IC 12.

Since the liquid-crystal display device of this embodiment is arranged as described above, when voltage application to the electrodes 3 and 4 is controlled by the driver IC 12 while light is emitted from the back light unit 15, a desired visible image is displayed in the effective display region D.

While the visible image is displayed as described above, part of light emitted from the back light unit 15 tends to be irradiated on the active surface 12a of the driver IC 12 through the upper and side surfaces of the semiconductor element 12 and the joint portion between the first substrate 1 and the semiconductor element 12. Depending on cases, sunlight passes through the first substrate 1 or passes around the end portion of the first substrate 1. Thereafter, the light tends to be incident on the active surface 12a through the upper and side

surfaces of the semiconductor element 12 and the joint portion between the first substrate 1 and the semiconductor element 12.

In addition, light emitted from the back light unit 15 or sunlight tends to be directly incident on the active surface 12a through the first substrate 1. It is not too preferable for the driver IC 12 that light is incident on the active surface 12a.

In this embodiment, progressing of the light which tends to be incident on the active surface of the driver IC through the upper and side surfaces of the driver IC 12 and the joint portion between the first substrate 1 and the semiconductor element 12 is blocked by the polarizing plate extended portion 7a, and the active surface 12a is shielded from light. The light-shielding member 7a for shielding the driver IC 12 from light is constituted as follows. That is, the polarizing plate 7 quite generally used in the liquid-crystal display device is increased in area, and the polarizing plate 6 is simply arranged to cover the driver IC 12. Therefore, a specially complex processing step need not be performed to arrange the light-shielding member 7a, and the liquid-crystal display device is extremely economical with respect to the number of parts or the number of manufacturing steps.

Progressing of the light which tends to be incident on the active surface 12a of the driver IC 12 through the first substrate 1 is blocked by the polarizing plate extended portion 6a, and the active surface 12a is sufficiently shielded from

light in practice. As a result, the driver IC 12 can be reliably prevented from being erroneously operated by light reception.

Like the above light-shielding member 7a, the second light-shielding member 6a for shielding the active surface side of the driver IC 12 is constituted as follows. That is, the polarizing plate 6 quite generally used in the liquid-crystal display device is increased in area, and the polarizing plate 6 is simply fixed to the rear surface of the first substrate 1 when viewed from the driver IC 12. Therefore, a specially complex processing step need not be performed to arrange the second light-shielding member, and the liquid-crystal display device is extremely economical with respect to the number of parts or the number of manufacturing steps. When a light-shielding layer is formed between the driver IC 12 and the first substrate 1 as in the prior art, the light-shielding layer must be formed as a proper pattern in consideration of the problems of electric capacitance or electric insulation. However, the polarizing plate extended portion 6a operating as the light-shielding member in this embodiment can be formed as an arbitrary pattern which can exercise sufficient light-shielding performance. Therefore, the driver IC 12 can be reliably shielded from light.

(Second Embodiment)

FIG. 2 shows the second embodiment of a liquid-crystal display device according to the present invention. In this liquid-crystal display device, a light-shielding sheet member

26 operating as a second light-shielding member is adhered to a surface, which is opposite to a driver IC 12, of a first substrate 1 to which a driver IC 12 is joined. In addition, when the surface of the driver IC 12 other than an active surface 12a is covered with a resin mold 36, the resin mold 36 is used as the light-shielding member.

The second light-shielding sheet member 26 can be constituted by a flexible adhesive tape having black or another non-transparent color, a non-flexible adhesive sheet having black or another non-transparent color, or the like. In addition, the resin mold 36 can consist of an arbitrary resin material, having light-shielding properties, such as a thermoplastic resin or a thermosetting resin.

(Third Embodiment)

FIG. 3 shows the third embodiment of a liquid-crystal display device according to the present invention. In this liquid-crystal display device, one adhesive tape 46 having light-shielding properties and flexibility is adhered to a first substrate 1 such that the adhesive tape 46 is bent around the first substrate 1, thereby constituting a light-shielding member 46a on the substrate side and a light-shielding member 46b on a driver IC 12 side. According to this embodiment, when the very simple operation that one adhesive tape 46 is adhered to both the front and rear surfaces of the first substrate 1 is performed, the driver IC 12 can be reliably shielded from light. When a tape material also having elasticity is used as



the adhesive tape 46, the tape can be fitted on the driver IC 12 and the substrate 1 in a tight contact state.

(Fourth Embodiment)

FIG. 4 shows the fourth embodiment of a liquid-crystal display device according to the present invention. In this liquid-crystal display device, an adhesive tape 47 having light-shielding properties is stuck on a driver IC 12 to cover the driver IC 12, thereby constituting a light-shielding member 47. In the second light-shielding member on the substrate side, as in the first embodiment, a polarizing plate quite generally used in a liquid-crystal display device is increased in area, and a polarizing plate 6 is simply fixed to the rear surface of a first substrate 1 when viewed from the driver IC 12.

(Fifth Embodiment)

FIG. 6 is a view showing the details of the connection portion of an electronic device according to the present invention, and FIG. 7 is a view showing the electronic device according to the present invention. An end portion 1a of a first substrate 1 projects outside a second substrate 2, an IC output terminal 3a extending from an ITO electrode 3 and an IC input terminal 11 electrically connected to the output terminal (not shown) of a connection circuit substrate 48 are formed on the inside surface of the projection portion 1a. The input terminal (not shown) of the connection circuit substrate 48 is connected to a main substrate 49 for sending an external input signal input from an external key 50 to the driver IC 12. The driver IC 12

serving as a semiconductor element is electrically and mechanically directly fixed to the first substrate 1 by an ACF 14 in such a manner that the so-called active surface 12a faces the first substrate 1. Of the surfaces of the driver IC 12 joined to the first substrate 1, surfaces other than the surface joined to the first substrate 1 are covered with the resin mold 36 serving as a light-shielding member. The resin mold 36 can consist of an arbitrary resin material, having light-shielding properties, such as a thermoplastic resin or a thermosetting resin. A light-shielding sheet member 26 operating as a second light-shielding member is adhered to a surface, which is opposite to a driver IC 12, of a first substrate 1 to which a driver IC 12 is joined. The light-shielding sheet member 26 can be constituted by a flexible adhesive tape having black or another non-transparent color, a non-flexible adhesive sheet having black or another non-transparent color, or the like. The light-shielding sheet member 26 is arranged to stick out of the first substrate, and the sticking portion is stuck on the connection circuit substrate 48 to overlap it. In this manner, the light-shielding sheet member 26 operates to reinforce the connection between the connection circuit substrate and the first substrate.

In this embodiment, the resin mold 36 is used as a light-shielding member, and a light-shielding adhesive tape is used as the second light-shielding member. However, as the light-shielding member and the second light-shielding member,

both the light-shielding member and the second light-shielding member which are described in the first to fourth embodiments can be used, as a matter of course.

(Another Embodiment)

The present invention has been described with reference to the preferable embodiments. However, the present invention is not limited to these embodiments, and the present invention is variously modified within the technical range described in the claims.

For example, the present invention is not limited to not only a liquid-crystal display device using a simple matrix method, but also a liquid-crystal display device using an active matrix method. A method of joining the driver IC 12 to the substrate is not limited to a method using an ACF, and an arbitrary joining method can be employed. As a back light unit, not only a unit constituted by an LED and a light-guide plate, but also another arbitrary light-emitting means such as an EL (Electro Luminescence) can be used. In each of the embodiments shown in FIGS. 1 to 4, the back light unit 15 is arranged on the substrate 2 side opposite to the substrate 1 to which the driver IC 12 is joined. In place of this arrangement, the back light unit 15 may be arranged on the substrate 1 side to which the driver IC 12 is joined.

As the fifth embodiment, a portable telephone is exemplified. However, the present invention can be applied to not only a portable telephone but also a PDA (Personal Digital

Assistant), a personal computer, a car navigation system, and the like.

CLAIMS

1. A liquid-crystal display device having a pair of substrates which are opposite to each other through a liquid crystal, and a semiconductor element which is directly joined to at least one of said substrates,

characterized in that a portion other than a surface, which is joined to one of said substrates, of the surfaces of said semiconductor element is covered with a light-shielding member portion.

2. A liquid-crystal display device according to claim 1, characterized in that a second light-shielding member for shielding light being toward said semiconductor element is arranged on a surface, opposite to the surface, to which said semiconductor element is joined, of the surfaces of one of said substrates.

3. A liquid-crystal display device according to claim 2, characterized in that a plurality of pixels having no active element are arranged between said pair of substrates.

4. A liquid-crystal display device according to any one of claims 1 to 3,

characterized in that said semiconductor element is joined to one of said substrates such that an active surface

of said semiconductor element faces said substrate.

5. A liquid-crystal display device according any one of claims 1 to 4,

characterized in that a polarizing plate is arranged on a surface of the other of said substrates, and said light-shielding member is constituted by a portion located outside an effective display region of said polarizing plate.

6. A liquid-crystal display device according to any one of claims 1 to 4,

characterized in that said light-shielding member is a molding resin which covers the surface of said semiconductor element joined to said substrate.

7. A liquid-crystal display device according to any one of claims 2 to 4,

characterized in that said light-shielding member and said second light-shielding member are constituted such that a light-shielding tape having light-shielding properties and flexibility is adhered to one of said substrates to be bent around said substrate.

8. A liquid-crystal display device according to any one of claims 2 to 4,

characterized in that a polarizing plate is arranged on

a surface of one of said substrates, and said second light-shielding member is constituted by a portion located outside an effective display region of said polarizing plate.

9. A liquid-crystal display device according to one of claims 2 to 6,

characterized in that said second light-shielding member is constituted such that a planar sheet member having light-shielding properties is adhered to a surface of one of said substrates.

10. An electronic device in which a liquid-crystal display device having a pair of substrates which are opposite to each other through a liquid crystal and a semiconductor element which is directly joined to at least one of said substrates and a main body having a main substrate for sending an external input signal to said semiconductor element are connected to each other by a connection circuit substrate,

characterized in that a portion other than a surface, which is joined to one of said substrates, of the surfaces of said semiconductor element is covered with a light-shielding member.

11. An electronic device according to claim 10,  
characterized in that a second light-shielding member for shielding light being toward said semiconductor element is

arranged on a surface, opposite to the surface, to which said semiconductor element is joined, of the surfaces of one of said substrates to extend to an outside position of one of said substrates, and

the extended portion of said second light-shielding member is arranged to overlap the connection circuit.



ABSTRACT

A liquid-crystal display device has a pair of substrates (1, 2) which are opposite to each other and a semiconductor element which is directly joined to the substrate (2). A portion other than an active surface (12a) of the surfaces of the semiconductor element (12) is covered with a light-shielding member portion (16). Since the light-shielding member (16) completely shields light irradiated from the upper and side surfaces of the semiconductor element (12) and a joint surface between the semiconductor element (12) and the substrate (1), the semiconductor element (12) can be prevented from being erroneously operated.

1/8

FIG. 1

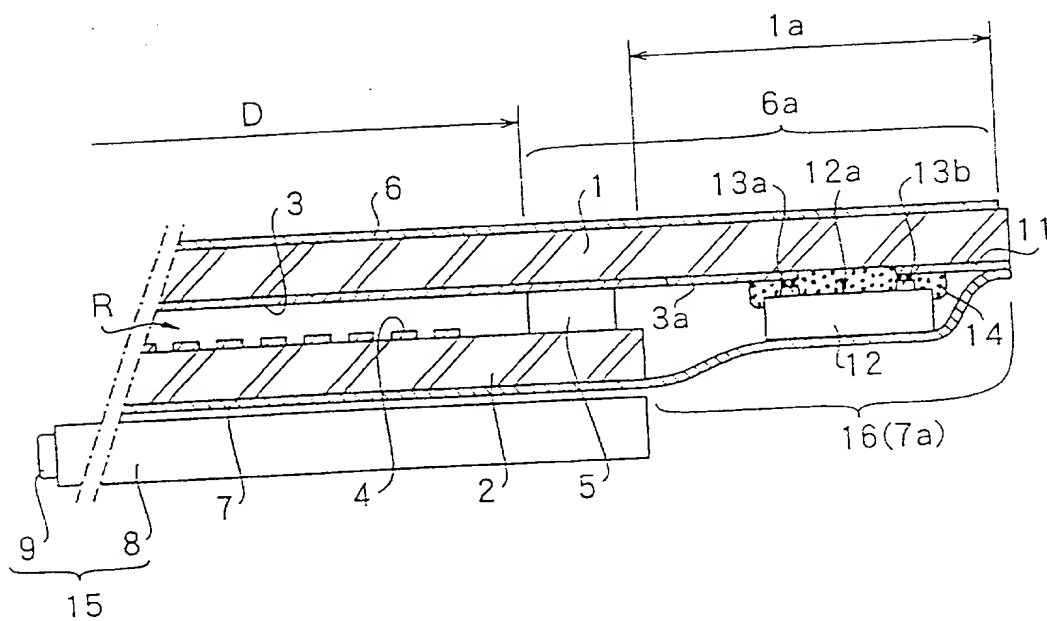


FIG. 2

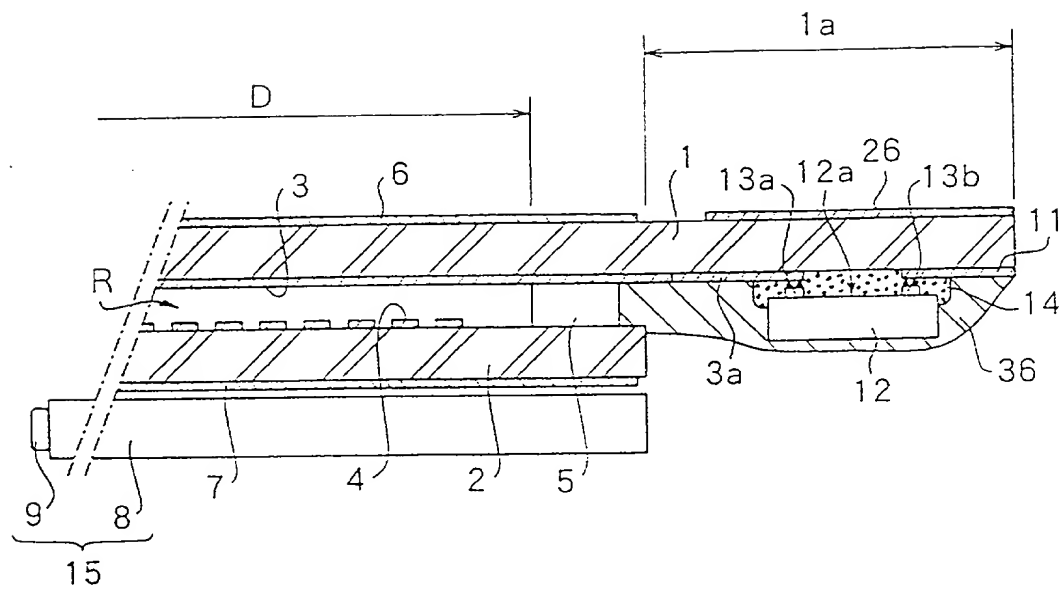


FIG. 3

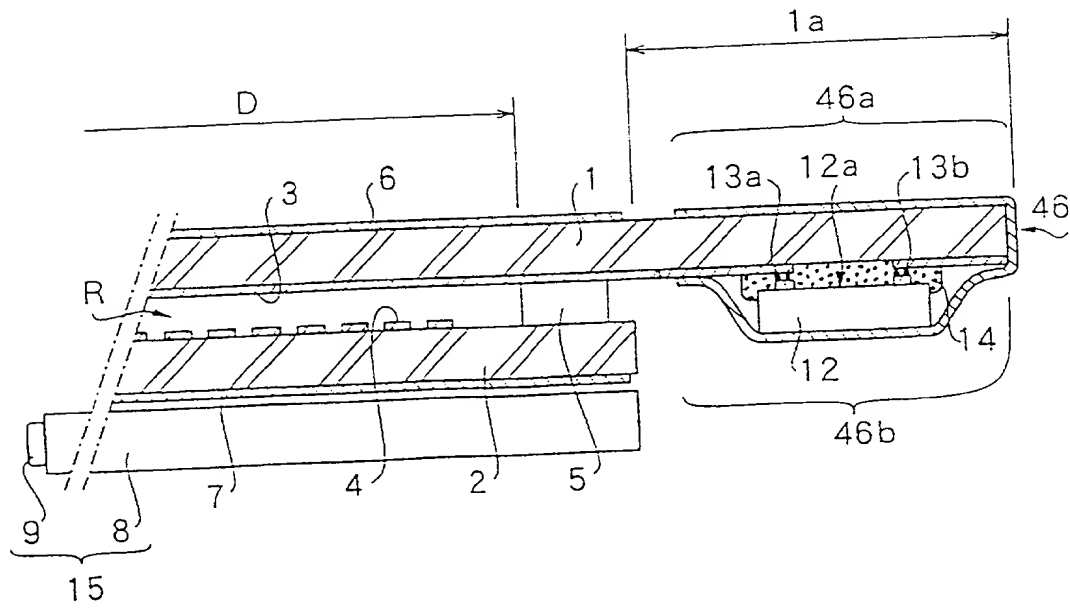
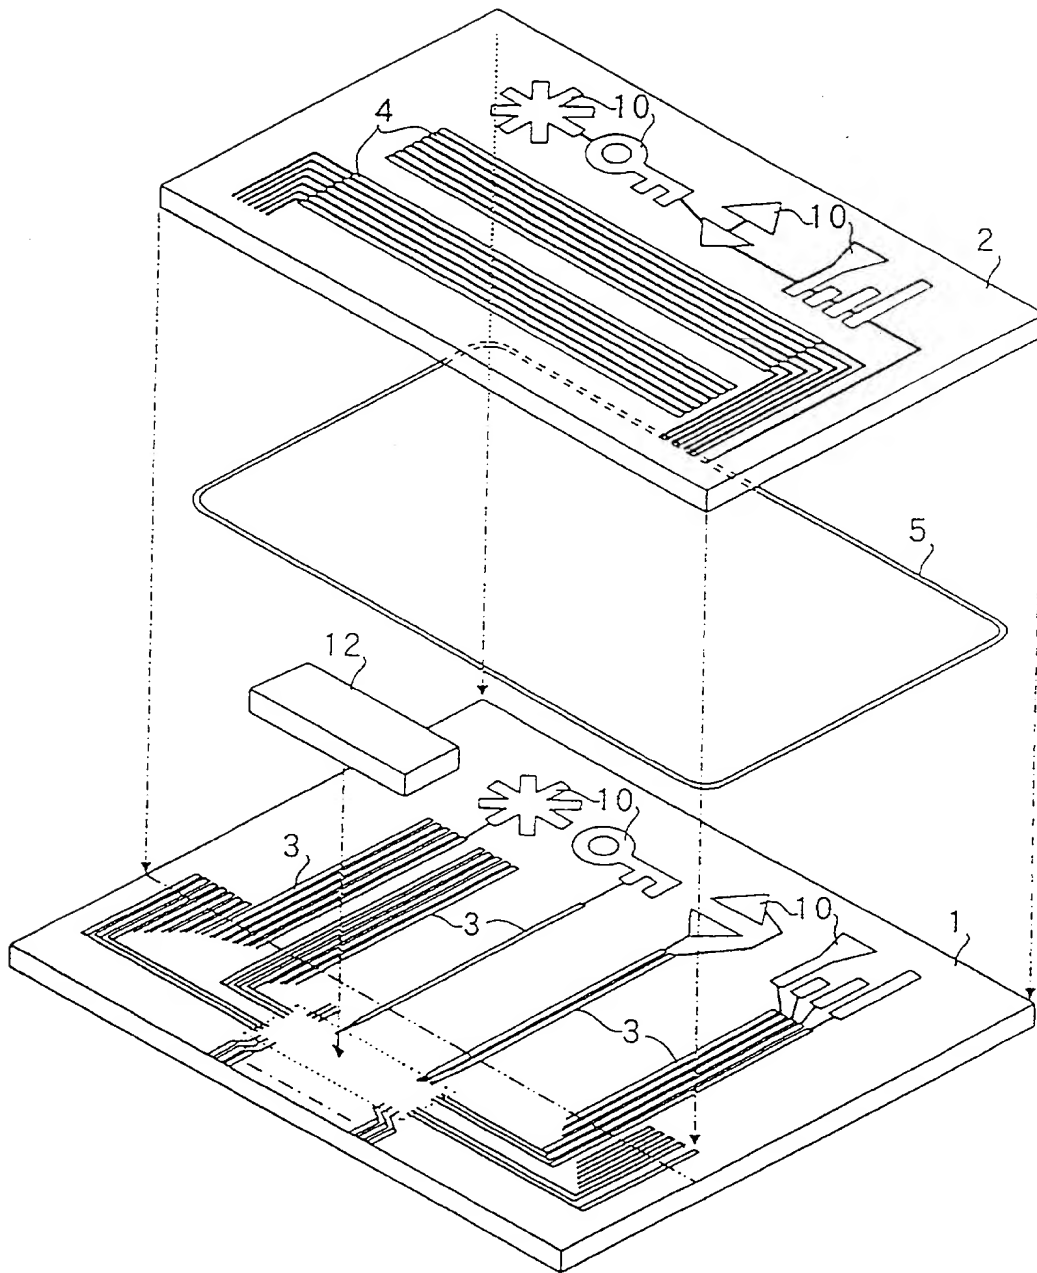


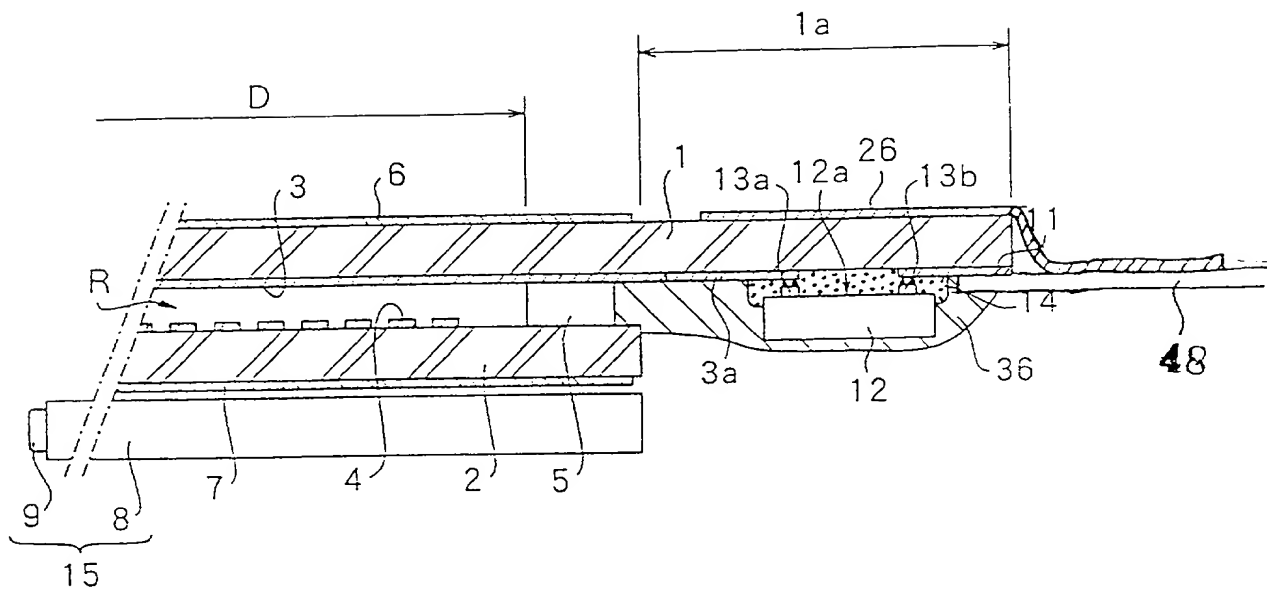


FIG. 5



6/8

FIG. 6



7/8

FIG. 7

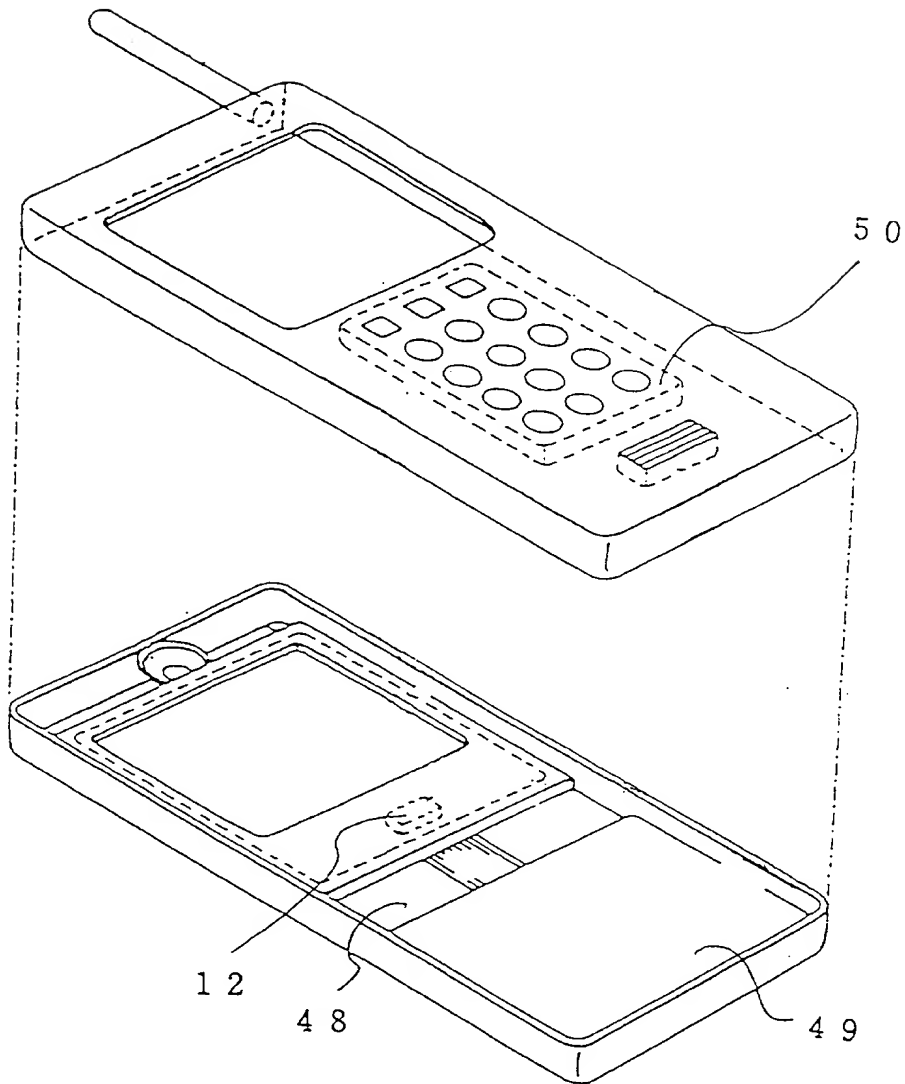
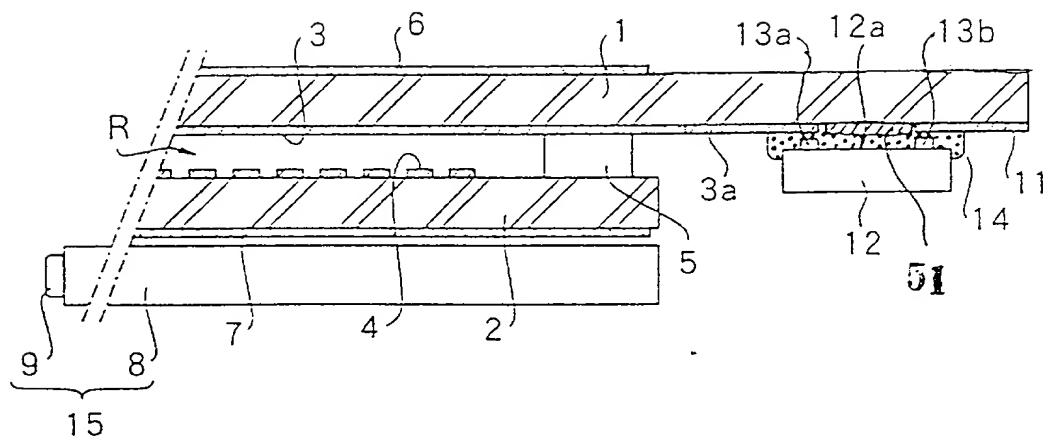




FIG. 8



MAR. 16. 1998 5:41PM

HARNESS, DICKEY &amp; PIERCE TROY MI

NO. 040

P. 7/11

PTO/SB/106 (8-96)

Approved for use through 9/30/99. OMB 0634-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

9319S-000059

**Declaration and Power of Attorney For Patent Application****特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare: 'that;

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated near to my name.

下記の名前の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名前が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

液晶表示装置およびそれを用いた  
電子機器Liquid Crystal Display Device and  
Electronic Device Using the Same

上記発明の明細書（下記の欄でX印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとあり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS, SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

MAR. 16. 1998

5:42PM

HARNESS, DICKEY &amp; PIERCE TROY MI

NO. 040

P. 8/11

PTO/SB/106 (8-06)

Approved for Use through 9/30/98. OMB 0651-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### Japanese Language Declaration (日本語宣言書)

私は、米国法典第 3 5 編 1 1 9 条 (a) - (d) 項又は 3 6 5 条 (b) 項に基づき下記の、米 国以外の国の少なくとも一ヶ国を指定している特許協力条約 3 6 5 (a) 項に基づき出願、又は外国での特許出願もしくは発明者権の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者権の外国出願を以下に、枠内をマークすることで、示しています。

#### Prior Foreign Application(s)

外国での先行出願  
8-207402

(Number) (番号)	Japan (Country) (国名)
(Number) (番号)	(Country) (国名)

私は、第 3 5 編米国法典 1 1 9 条 (e) 項に基づいて下記の米 国特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第 3 5 編 1 2 0 条に基づいて下記の米 国特許出願に記載された権利、又は米 国を指定している特許協力条約 3 6 5 条 (c) に基づき権利をここに主張します。また、本出願の各種米 国法典第 3 5 編 1 1 2 条第 1 項又は特許協力条約で規定された方法で先行する米 国特許出願に開示されていない限り、その先行米 国出願書提出日以降で本出願書の日本国内または特許協力条約国提出日までの期間中に入手された、連邦規則法典第 3 7 編 1 条 5 6 項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

PCT/JP97/02543 (Application No.) (出願番号)	23/7/97 (Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第 1 8 編第 1 0 0 1 条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any (foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed  
優先権主張なし

6/8/96 (Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 366(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

Pending (Status: Patented, Pending, Abandoned) (状況: 特許許可済、係属中、放棄済)
(Status: Patented, Pending, Abandoned) (状況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

MAR.16.1998 5:42PM

HARNESS, DICKEY &amp; PIERCE TROY MI

NO.040 P.9/11

PTO/SB/06 (8-86)

Approved for use through 3/30/98 OMB 0851-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁護士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

G. Gregory Schivley, Reg. No. 27,382, Bryant E. Wade, Reg. 40,344

書類送付先

Send Correspondence to:

G. Gregory Schivley, Esq.  
Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, MI 48303

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

G. Gregory Schivley, Esq.  
(248) 641-1600

第一または第一発明者名 村松公永 100	Full name of sole or first inventor Eiji MURAMATSU
発明者の署名 村松公永 日付	Inventor's signature Eiji Muramatsu Date March 25, 1998
住所 日本国長野県	Residence Nagano, Japan
国籍 日本国	Citizenship Japan
実務所 c/o Seiko Epson Corporation, 3-5, Owa 3-chome, Suwa-shi	Post Office Address
392-8502 日本国長野県諏訪市大和3丁目3-5	Nagano-ken, 392-8502 JAPAN
第二共同発明者	Full name of second joint inventor, if any
第二共同発明者 日付	Second inventor's signature Date
住所	Residence
国籍	Citizenship
実務所	Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)